


CR 60 BUTYL | PRE-CURED SOLID MATERIAL BASED ON BROMO BUTYL SYNTHETIC RUBBER

CR 60 BUTYL is a premium grade, pre-cured 60 Shore A Hardness Bromo Butyl Synthetic Rubber, used in hydrochloric acid, diluted at ambient temperature.

PRODUCT OVERVIEW

- Typical applications include lining of tanks, launders, pipes, and chutes.
- Not suited for abrasion and high wear applications.

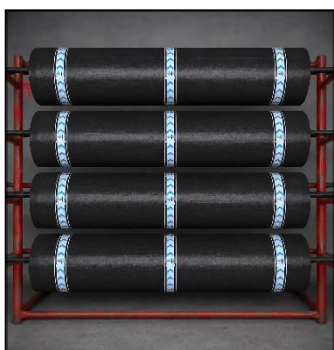

PHYSICAL PROPERTIES

DESCRIPTION	BROMO BUTYL (BIIR)
Hardness (SANS 10048)	60±5 Shore A
Specific Gravity (S.G)	1.18 (±0.2) g/cm ³
Elongation At Break (SANS 10037)	500% (min)
Tensile Strength (SANS 10037)	7 Mpa (min)
Classification (SANS 1198-2005)	Type 2 Grade C Class 60
Tear Strength (ISO 34:2022)	N/A
Abrasion Loss (ISO Method B)	N/A
Temperature Range	Minus 40°C to 120°C
Shelf Life @23°C	6 months from manufacture date

STANDARD FEATURES

- 01** Roll Width: 1200mm–1450mm wide (custom on request)
- 02** Thickness Range: 1.5mm–20.0mm
- 03** Length Range: 10 or 12m (custom on request)
- 04** Available Colours: Black
- 05** Packaging: Black Plastic

RECOMMENDED STORAGE CONDITIONS:
Store below 23°C out of direct sunlight.

Typical values may vary by batch and application and are **not** a performance guarantee. Users must confirm material suitability before use.



ADHESION SYSTEM

CURED RUBBER TO METAL

-  **HeroPrime@105 (Grey Metal Primer)**
Drying time 20-30 minutes at room temperature
-  **HeroBond@200 & Hardener**
Drying time 20-30 minutes at room temperature
-  **Application**
12,0 sq.m/litre - @ 10micron dry film thickness
±700gms/m² (depending on the roughness of the surface)



NOTE:

- The handling precautions above are limited to general recommendations based on information obtained from suppliers of individual compounding ingredients.
- Information is given with the understanding that the manufacturer will satisfy themselves that precautions to health and safety hazards presented by their conditions of use are adequate.
- Since conditions of product and disposal is outside our control we make no warranties, express or implied, and assume no liability in connection with any use of this information.